

# Mega Pixel Ruggedized Lens for image circle 16 mm

## Cinegon 1.8/16 - Ruggedized

In accordance with the sensitivity of modern 1" CCD and CMOS sensors, the megapixel lenses are corrected and broadband-coated for the spectral range of 400 – 1000 nm ( VIS + NIR ). Even under production and / or extreme conditions, the robust mechanical design with lockable focus and iris setting mechanism guarantees reliable continuous use in which the set optical parameters remain in place.



Cinegon 1.8/16

### Key Features

- High-resolution optics
- Stabilized mechanism
- Highest optical imaging performance even with smallest pixel sizes
- Broadband coating (400 - 1000 nm)
- Compact and low weight
- Vibration insensitivity for stable imaging performance, secured ring
- Focus and iris setting lockable

### Applications

- 3D measurement
- Machine Vision and other imaging applications
- Traffic
- Medical
- Robot vision
- Food processing

### Technical Specifications

F-number	1.8
Focal length	16.4 mm
Image circle	16 mm
Transmission	400 - 1000 nm
Interface	C-Mount
Weight	102 gr.
Filter Thread	M30.5 x 0.5
Order No.	1058928



### Contact

Jos. Schneider Optische Werke GmbH  
 Ringstraße 132  
 55543 Bad Kreuznach  
 Germany  
 Phone +49 671 601-205  
 Fax +49 671 601-286  
[www.schneiderkreuznach.com](http://www.schneiderkreuznach.com)  
[industrie@schneiderkreuznach.com](mailto:industrie@schneiderkreuznach.com)

Schneider Optical Technologies Co., Ltd.  
 Rm. A505 Yingdali Science Park, Hongmian Rd.,  
 Futian Free Trade Zone, Shenzhen 518038,  
 P.R. China  
 Phone: +86 755 88 32 11 70  
 Fax: +86 755 88 32 11 75  
[www.schneiderkreuznach.com](http://www.schneiderkreuznach.com)  
[info@schneider-asiapacific.com](mailto:info@schneider-asiapacific.com)


Schneider Optics Inc.  
 285 Oser Ave.  
 Hauppauge, NY 11788  
 USA  
 Phone +1 631 761-5000  
 Fax +1 631 761-5090  
[www.schneideroptics.com/industrial](http://www.schneideroptics.com/industrial)  
[industrial@schneideroptics.com](mailto:industrial@schneideroptics.com)

# Cinegon 1.8/16 Ruggedized Lens

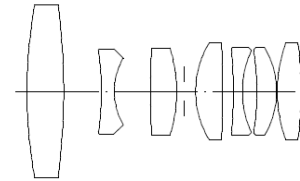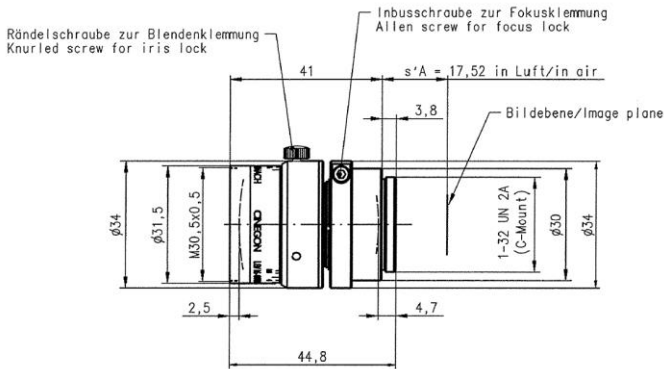

## CINEGON 1.8/16


$f'$	=	16.4 mm	$\beta'_p$	=	2.591
$s_F$	=	11.1 mm	$s_{EP}$	=	17.4 mm
$s_{F'}$	=	18.5 mm	$s_{AP}$	=	-24.1 mm
$HH'$	=	12.0 mm	$\Sigma d$	=	37.5 mm

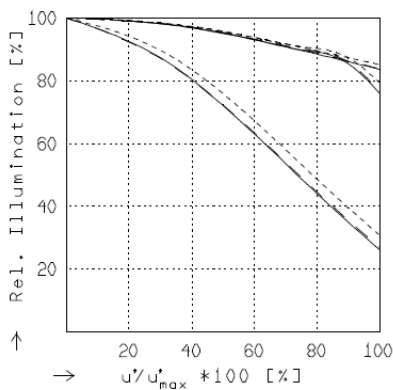

## RELATIVE ILLUMINATION

The relative illumination is shown for the given focal distances or magnifications.


	$f / 1.8$	$f / 4.0$	$f / 8.0$
—	$\beta' = 0.0000$	$u'_{max} = 8.0$	$00' = \infty$
- -	$\beta' = -0.0200$	$u'_{max} = 8.0$	$00' = 867.$
....	$\beta' = -0.1000$	$u'_{max} = 8.0$	$00' = 211.$

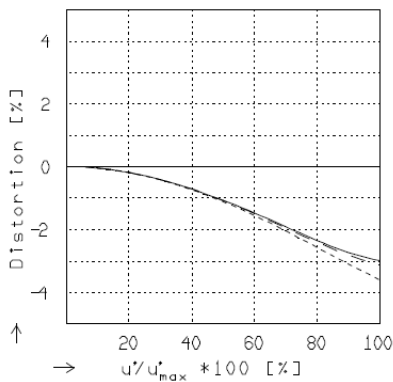

## DISTORTION

Distortion is shown for the given focal distances or magnifications. Positive values indicate pincushion distortion and negative values barrel distortion.

—	$\beta' = 0.0000$	$u'_{max} = 8.0$	$00' = \infty$
- -	$\beta' = -0.0200$	$u'_{max} = 8.0$	$00' = 867.$
....	$\beta' = -0.1000$	$u'_{max} = 8.0$	$00' = 211.$

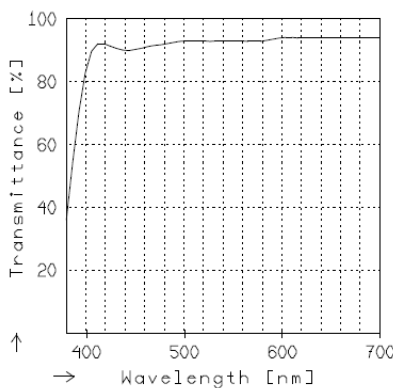

## TRANSMITTANCE

Relative spectral transmittance is shown with reference to wavelength.


# Cinegon 1.8/16 Ruggedized Lens

## CINEGON 1.8/16

MODULATION with reference to the relative image height

Wavelength $\lambda$	[nm]	555	655	605	505	455	405
Spectral weighting	[%]	19.6	23.7	22.2	15.7	12.1	6.7
Spatial frequency R	[1/mm]	10	20	30			
Format	[mm X mm]	9.6	X	12.8			
Diagonal $2u'$	[mm]	16.0					

radial —  
tangential - - -

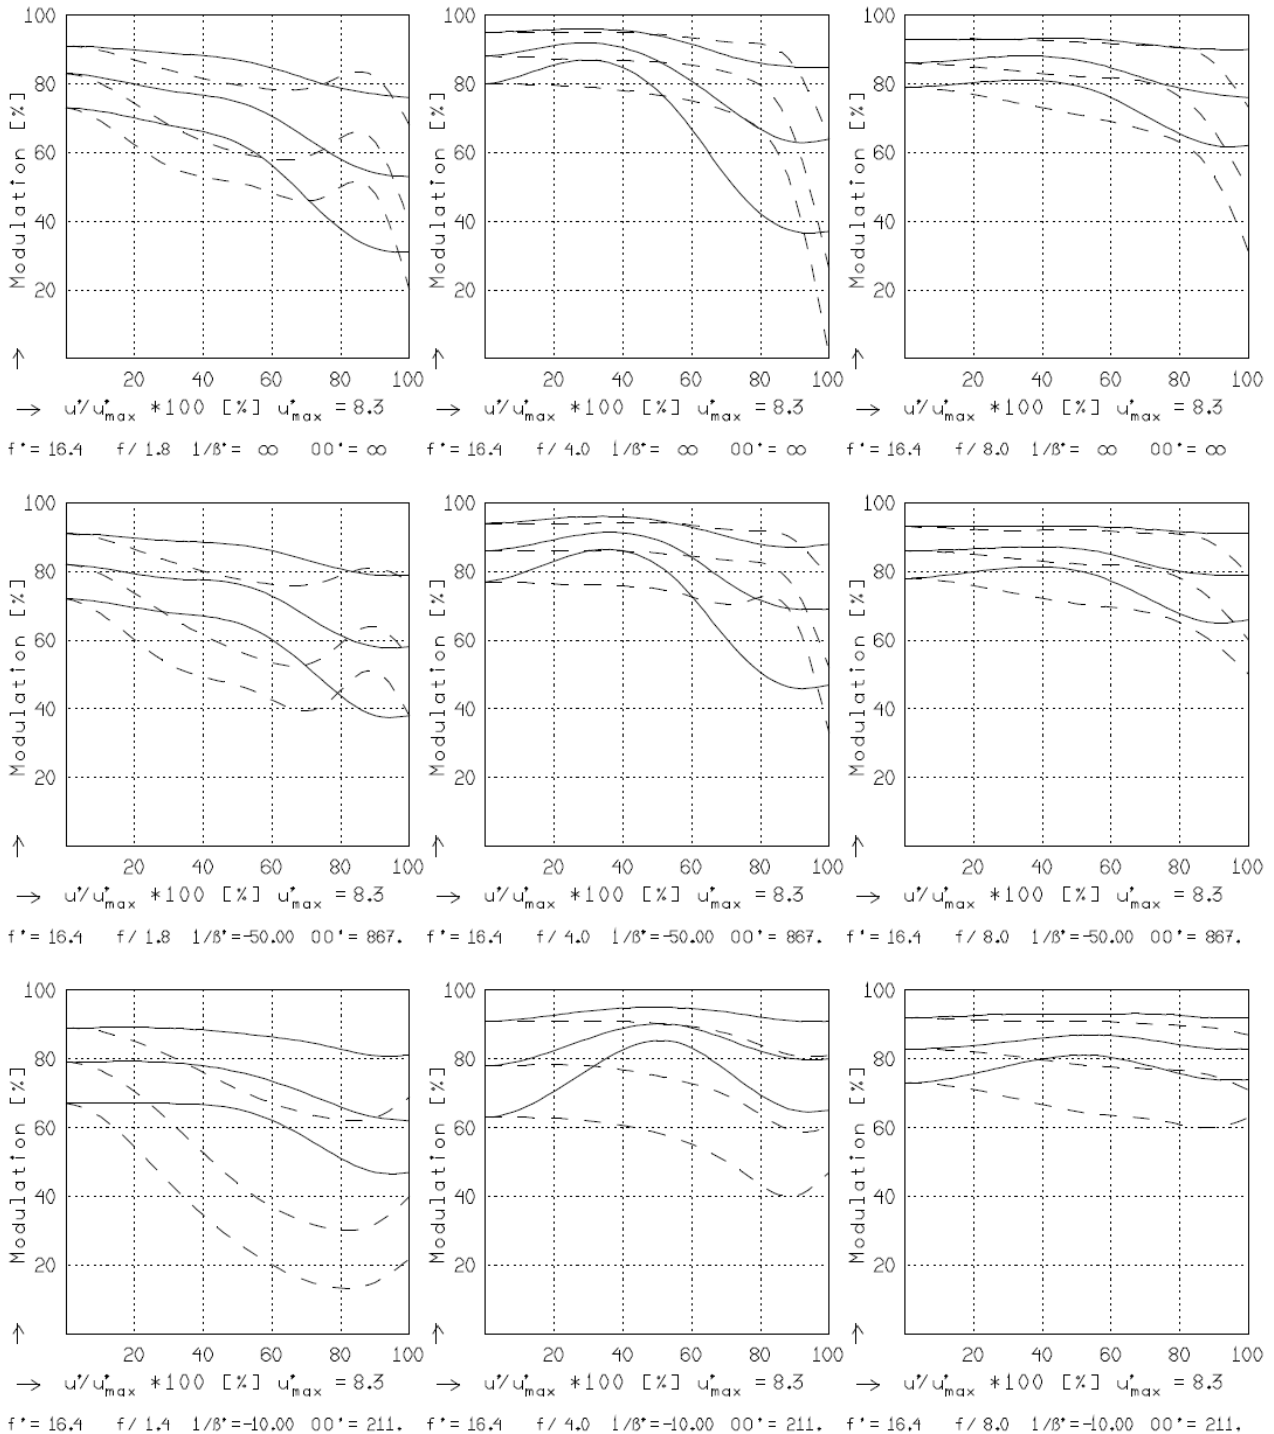

Focusing :  $MTF_{max}$  at  $f / 1.8$  ,  $R = 30$  1/mm,  $u'/u'_{max} = 0$