

Ruggedized Lens

Cinegon 1.4/8 – Ruggedized

In accordance with the sensitivity of modern 2 / 3" CCD and CMOS sensors, the 3 megapixel lenses are corrected and broadband-coated for the spectral range of 400 – 1000 nm (VIS + NIR). Even under production and / or extreme conditions, the robust mechanical design with lockable focus and iris setting mechanism guarantees reliable continuous use in which the set optical parameters remain in place.



Cinegon 1.4/8

Key Features

- High-resolution optics
- Stabilized mechanism
- Highest optical imaging performance even with smallest pixel sizes
- Broadband coating (400 - 1000 nm)
- Compact and low weight
- Vibration insensitivity for stable imaging performance, secured ring
- Focus and iris setting lockable

Applications

- 3D measurement
- Machine Vision and other imaging applications
- Traffic
- Medical
- Robot vision
- Food processing

Technical Specifications

F-number	1.4
Focal length	8.2 mm
Image circle	11 mm
Transmission	400 - 1000 nm
Interface	C-Mount
Weight	90 gr.
Option	Optical filter



Contact

Jos. Schneider Optische Werke GmbH
 Ringstraße 132
 55543 Bad Kreuznach
 Germany
 Phone +49 671 601-205
 Fax +49 671 601-286
www.schneiderkreuznach.com
industrie@schneiderkreuznach.com

Schneider Optical Technologies Co., Ltd.
 Rm. A505 Yingdali Science Park, Hongmian Rd.,
 Futian Free Trade Zone, Shenzhen 518038,
 P.R. China
 Phone: +86 755 88 32 11 70
 Fax: +86 755 88 32 11 75
www.schneiderkreuznach.com
info@schneider-asiapacific.com

Schneider Optics Inc.
 285 Oser Ave.
 Hauppauge, NY 11788
 USA
 Phone +1 631 761-5000
 Fax +1 631 761-5090
www.schneideroptics.com/industrial
industrial@schneideroptics.com

Cinegon 1.4/8 Ruggedized Lens

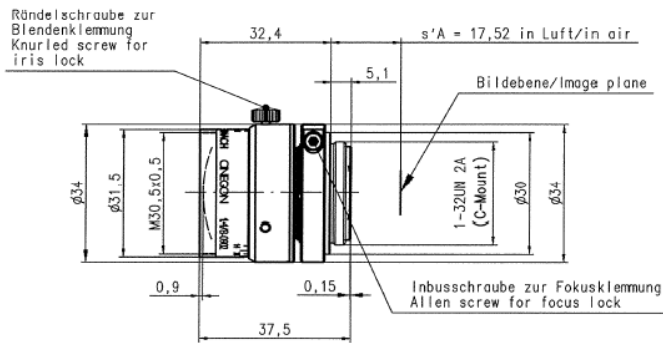

CINEGON 1.4/8.0MM


f^*	=	8.2 mm	β_p^*	=	4.796
s_F	=	11.7 mm	s_{EP}	=	13.4 mm
s_F^*	=	12.6 mm	s_{AP}^*	=	-27.0 mm
HH^*	=	20.9 mm	Σd	=	36.5 mm

CINEGON 1.4/8.0MM

MODULATION with reference to the relative image height



Wavelength λ	[nm]	555	655	605	505	455	405
Spectral weighting	[%]	19.6	23.7	22.2	15.7	12.1	6.7
Spatial frequency R	[1/mm]	10	20	30			
Format	[mm X mm]	6.6	X	8.8			
Diagonal $2u'$	[mm]	11.0					

radial —
tangential - -

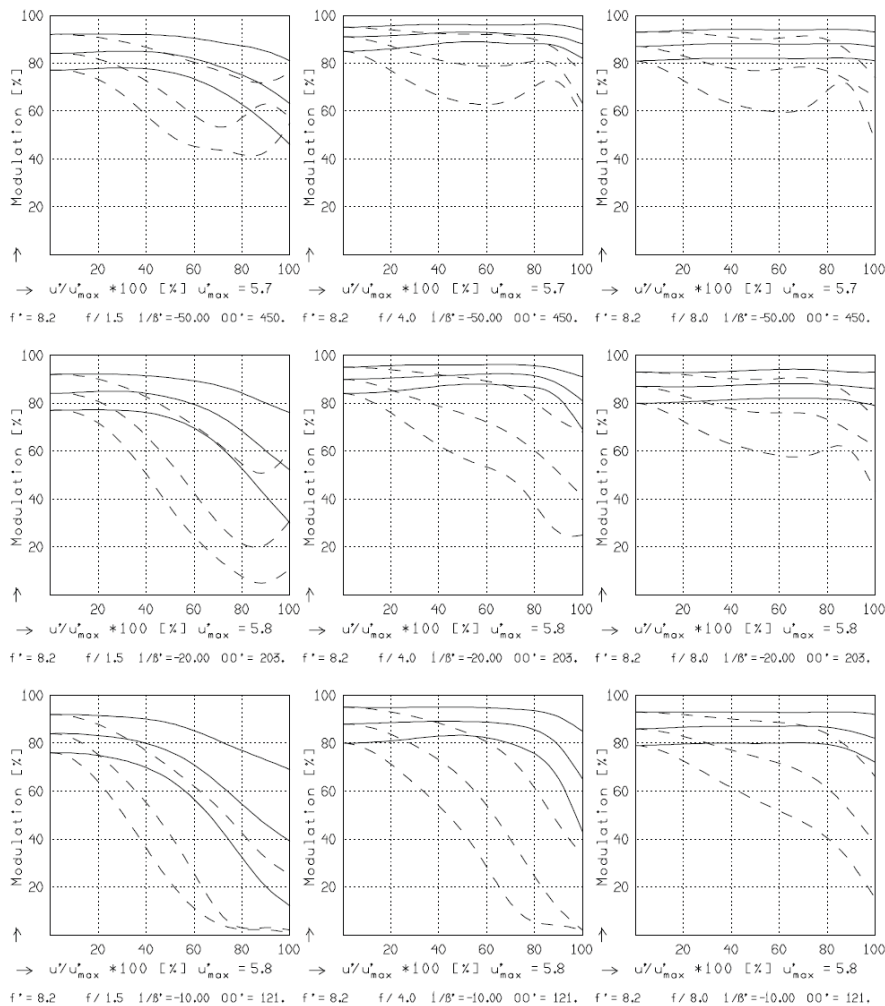


Focusing : MTF_{max} at $f / 1.4$, $R = 30$ 1/mm, $u'/u'_{max} = 0$

Cinegon 1.4/8 Ruggedized Lens

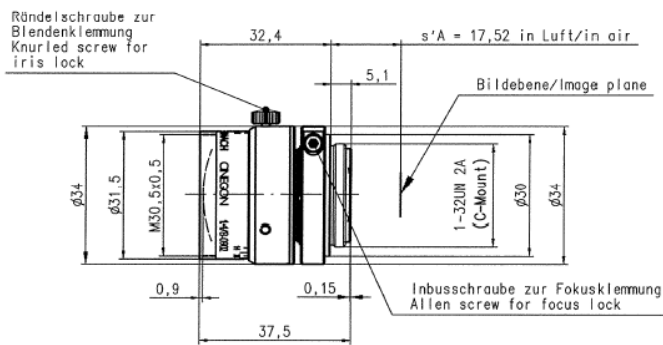

CINEGON 1.4/8.0MM


$f' = 8,2$ mm	$\beta_p = 4,796$
$s_F = 11,7$ mm	$s_{EP} = 13,4$ mm
$s_F^* = 12,6$ mm	$s_{AP}^* = -27,0$ mm
$HH^* = 20,9$ mm	$\Sigma d = 36,5$ mm

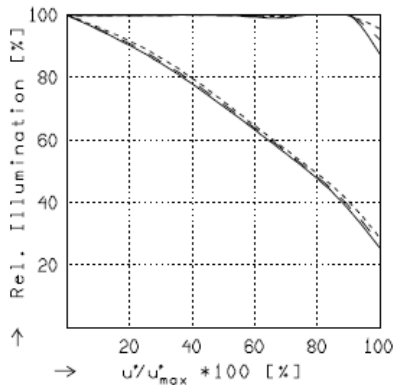

RELATIVE ILLUMINATION

The relative illumination is shown for the given focal distances or magnifications.


	$f / 1,5$	$f / 4,0$	$f / 8,0$
—	$\beta' = -0,0200$	$u'_{max} = 5,5$	$00' = 450.$
- -	$\beta' = -0,0500$	$u'_{max} = 5,5$	$00' = 203.$
----	$\beta' = -0,1000$	$u'_{max} = 5,5$	$00' = 121.$

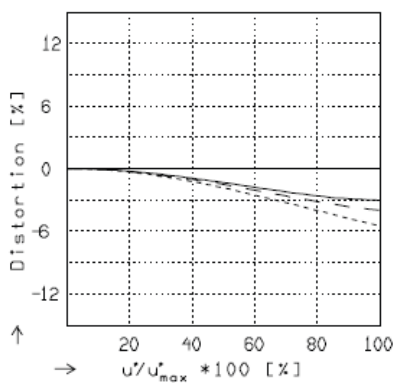

DISTORTION

Distortion is shown for the given focal distances or magnifications. Positive values indicate pincushion distortion and negative values barrel distortion.

—	$\beta' = -0,0200$	$u'_{max} = 5,5$	$00' = 450.$
- -	$\beta' = -0,0500$	$u'_{max} = 5,5$	$00' = 203.$
----	$\beta' = -0,1000$	$u'_{max} = 5,5$	$00' = 121.$

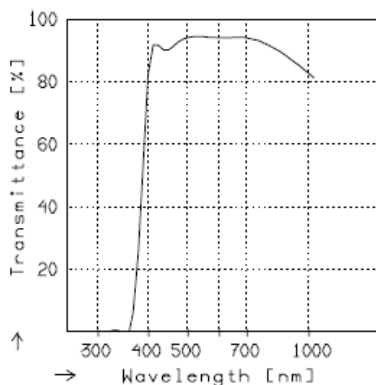

TRANSMITTANCE

Relative spectral transmittance is shown with reference to wavelength.