

High End 3D Lens

Cinegon 1.8/4.8 – High End 3D

In accordance with the sensitivity of modern 2 / 3" CCD and CMOS sensors, the 3 megapixel lenses are corrected and broadband-coated for the spectral range of 400 – 1000 nm (VIS + NIR). Even under production and / or extreme conditions, the robust mechanical design with lockable focus and iris setting mechanism guarantees reliable continuous use in which the set optical parameters remain in place.



Cinegon 1.8/4.8

Key Features

- High-resolution optics
- Stabilized optical axis
- Highest optical imaging performance even with smallest pixel sizes
- Broadband coating (400 - 1000 nm)
- Compact and low weight
- Vibration insensitivity for stable imaging performance, secured lens and ring
- Focus and iris setting lockable

Applications

- 3D measurement
- Machine Vision and other imaging applications
- Traffic
- Medical
- Robot vision
- Food processing

Technical Specifications

F-number	1.8
Focal length	5.0 mm
Image circle	11 mm
Transmission	400 - 1000 nm
Interface	C-Mount
Weight	90 gr.
Option	Optical filter
Filter thread	M62x0.75 (via adapter 14604)
Code no.	1001955



Contact

Jos. Schneider Optische Werke GmbH
 Ringstraße 132
 55543 Bad Kreuznach
 Germany
 Phone +49 671 601-205
 Fax +49 671 601-286
 www.schneiderkreuznach.com
 industrie@schneiderkreuznach.com

Schneider Optical Technologies Co., Ltd.
 Rm. A505 Yingdali Science Park, Hongmian Rd.,
 Futian Free Trade Zone, Shenzhen 518038,
 P.R. China
 Phone: +86 755 88 32 11 70
 Fax: +86 755 88 32 11 75
 www.schneiderkreuznach.com
 info@schneider-asiapacific.com

Schneider Optics Inc.
 285 Oser Ave.
 Hauppauge, NY 11788
 USA
 Phone +1 631 761-5000
 Fax +1 631 761-5090
 www.schneideroptics.com/industrial
 industrial@schneideroptics.com

Cinegon 1.8/4.8 High End 3D Lens

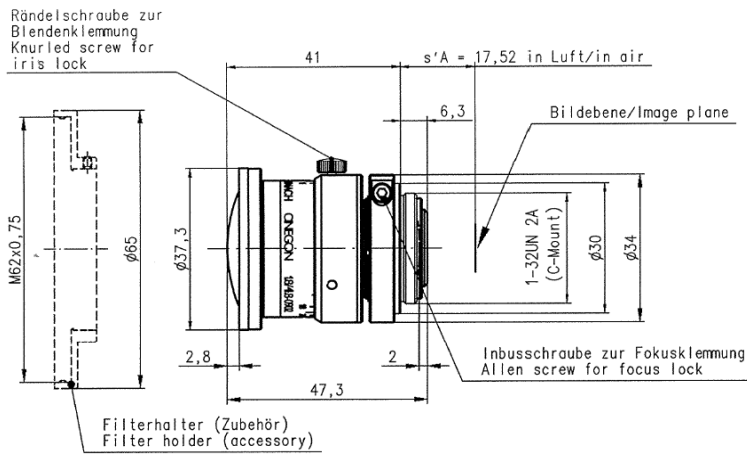

CINEGON 1.8/4.8


f'	=	5.0 mm	β'_p	=	6.632
s_F	=	13.2 mm	s_{EP}	=	13.9 mm
$s_{F'}$	=	13.2 mm	s_{AP}	=	-19.8 mm
HH'	=	35.4 mm	Σd	=	45.3 mm

CINEGON 1.8/4.8

MODULATION with reference to the relative image height



Wavelength λ	[nm]	555	655	605	505	455	405
Spectral weighting	[%]	19.4	23.2	21.7	15.4	11.8	8.5
Spatial frequency R	[1/mm]	10	20	30			
Format	[mm X mm]	6.6	X	8.8			
Diagonal $2u'$	[mm]	11.0					

radial —
tangential - -

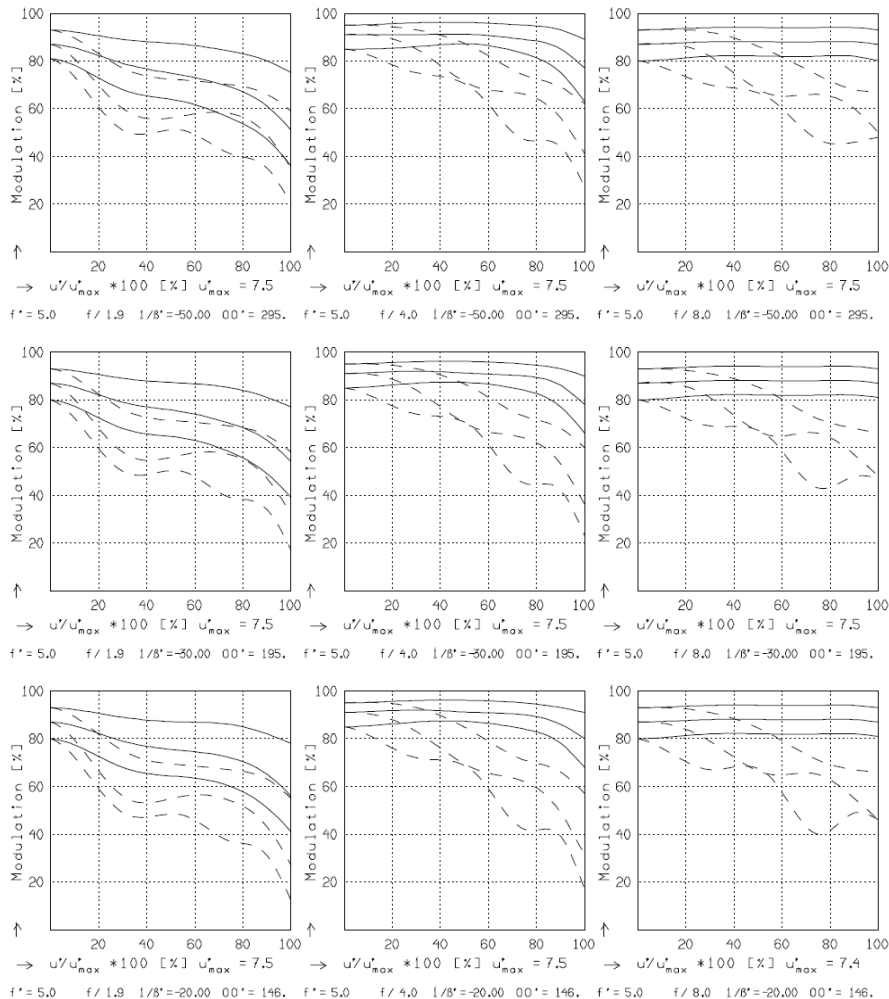


Focusing : MTF_{max} at f / 1.8 . R = 30 1/mm. $u'/u'_{max} = 0$

Cinegon 1.8/4.8 High End 3D Lens

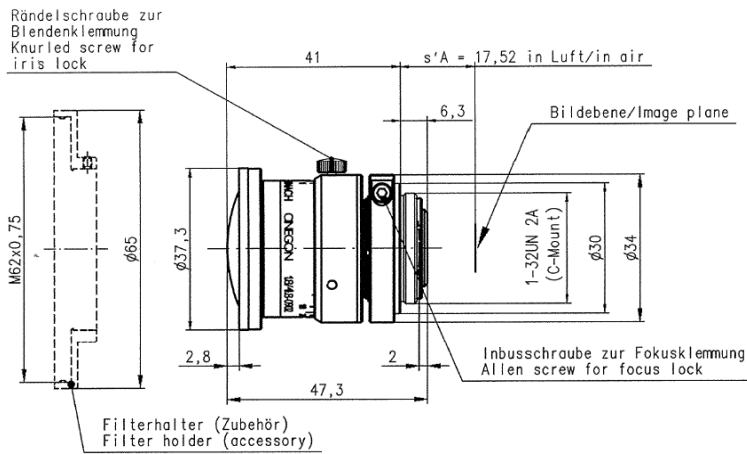

CINEGON 1.8/4.8


$f' = 5,0$ mm	$\beta'_p = 6,632$
$s_F = 13,2$ mm	$s_{EP} = 13,9$ mm
$s_{F'} = 13,2$ mm	$s_{AP} = -19,8$ mm
$HH' = 35,4$ mm	$\Sigma d = 45,3$ mm

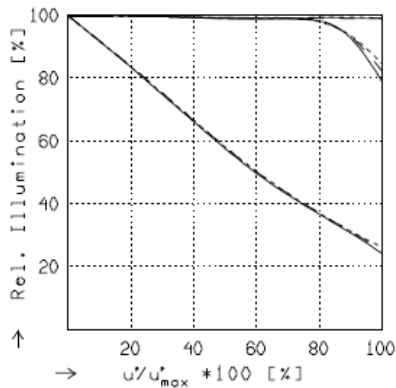

RELATIVE ILLUMINATION

The relative illumination is shown for the given focal distances or magnifications.


	$f / 1,9$	$f / 4,0$	$f / 8,0$
— $\beta' = -0,0200$	$u'_{max} = 5,5$	$00' = 294.$	
- - $\beta' = -0,0333$	$u'_{max} = 5,5$	$00' = 195.$	
- - - $\beta' = -0,0500$	$u'_{max} = 5,5$	$00' = 145.$	

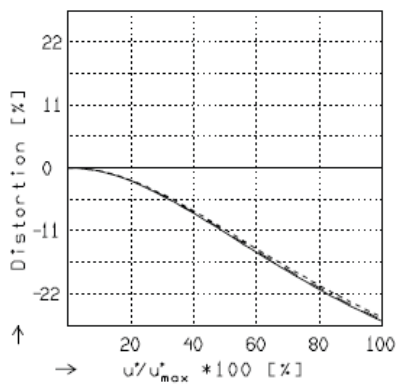

DISTORTION

Distortion is shown for the given focal distances or magnifications. Positive values indicate pincushion distortion and negative values barrel distortion.

— $\beta' = -0,0200$	$u'_{max} = 5,5$	$00' = 294.$
- - $\beta' = -0,0333$	$u'_{max} = 5,5$	$00' = 195.$
- - - $\beta' = -0,0500$	$u'_{max} = 5,5$	$00' = 145.$

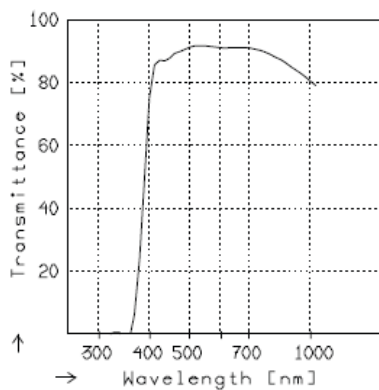

TRANSMITTANCE

Relative spectral transmittance is shown with reference to wavelength.