

# Ruggedized Lens

## Cinegon 1.8/4.8 – Ruggedized

In accordance with the sensitivity of modern 2 / 3" CCD and CMOS sensors, the 3 megapixel lenses are corrected and broadband-coated for the spectral range of 400 – 1000 nm ( VIS + NIR ). Even under production and / or extreme conditions, the robust mechanical design with lockable focus and iris setting mechanism guarantees reliable continuous use in which the set optical parameters remain in place.



Cinegon 1.8/4.8

### Key Features

- High-resolution optics
- Stabilized mechanism
- Highest optical imaging performance even with smallest pixel sizes
- Broadband coating (400 - 1000 nm)
- Compact and low weight
- Vibration insensitivity for stable imaging performance, secured ring
- Focus and iris setting lockable

### Applications

- 3D measurement
- Machine Vision and other imaging applications
- Traffic
- Medical
- Robot vision
- Food processing

### Technical Specifications

F-number	1.8
Focal length	5.0 mm
Image circle	11 mm
Transmission	400 - 1000 nm
Interface	C-Mount
Weight	90 gr.
Option	M62 x 0.75 (via adapter 14604)
Code no.	1001955



### Contact

Jos. Schneider Optische Werke GmbH  
 Ringstraße 132  
 55543 Bad Kreuznach  
 Germany  
 Phone +49 671 601-205  
 Fax +49 671 601-286  
[www.schneiderkreuznach.com](http://www.schneiderkreuznach.com)  
[industrie@schneiderkreuznach.com](mailto:industrie@schneiderkreuznach.com)

Schneider Optical Technologies Co., Ltd.  
 Rm. A505 Yingdali Science Park, Hongmian Rd.,  
 Futian Free Trade Zone, Shenzhen 518038,  
 P.R. China  
 Phone: +86 755 88 32 11 70  
 Fax: +86 755 88 32 11 75  
[www.schneiderkreuznach.com](http://www.schneiderkreuznach.com)  
[info@schneider-asiapacific.com](mailto:info@schneider-asiapacific.com)

Schneider Optics Inc.  
 285 Oser Ave.  
 Hauppauge, NY 11788  
 USA  
 Phone +1 631 761-5000  
 Fax +1 631 761-5090  
[www.schneideroptics.com/industrial](http://www.schneideroptics.com/industrial)  
[industrial@schneideroptics.com](mailto:industrial@schneideroptics.com)

# Cinegon 1.8/4.8 Ruggedized Lens

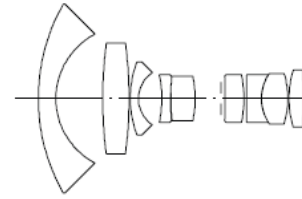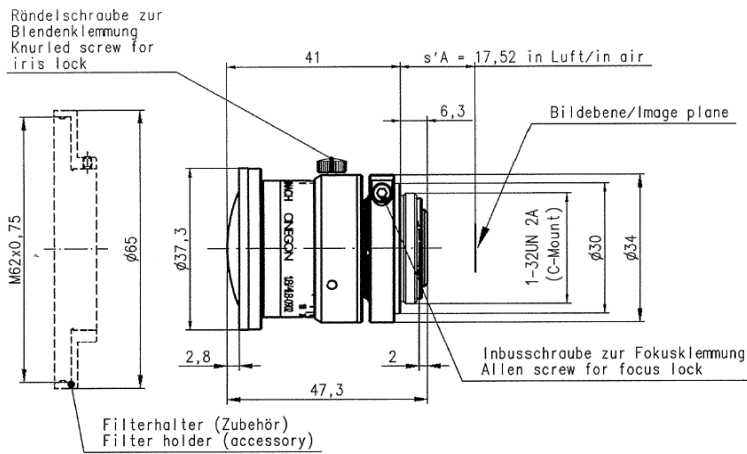

## CINEGON 1.8/4.8


$f'$	=	5,0 mm	$\beta'_p$	=	6,632
$s_F$	=	13,2 mm	$s_{EP}$	=	13,9 mm
$s_{F'}$	=	13,2 mm	$s_{AP}$	=	-19,8 mm
$HH'$	=	35,4 mm	$\Sigma d$	=	45,3 mm

### CINEGON 1.8/4.8

MODULATION with reference to the relative image height



Wavelength $\lambda$	[nm]	555	655	605	505	455	405
Spectral weighting	[%]	19,4	23,2	21,7	15,4	11,8	8,5
Spatial frequency R	[1/mm]	10	20	30			
Format	[mm X mm]	6,6	X	8,8			
Diagonal $2u'$	[mm]	11,0					

radial —  
tangential - -

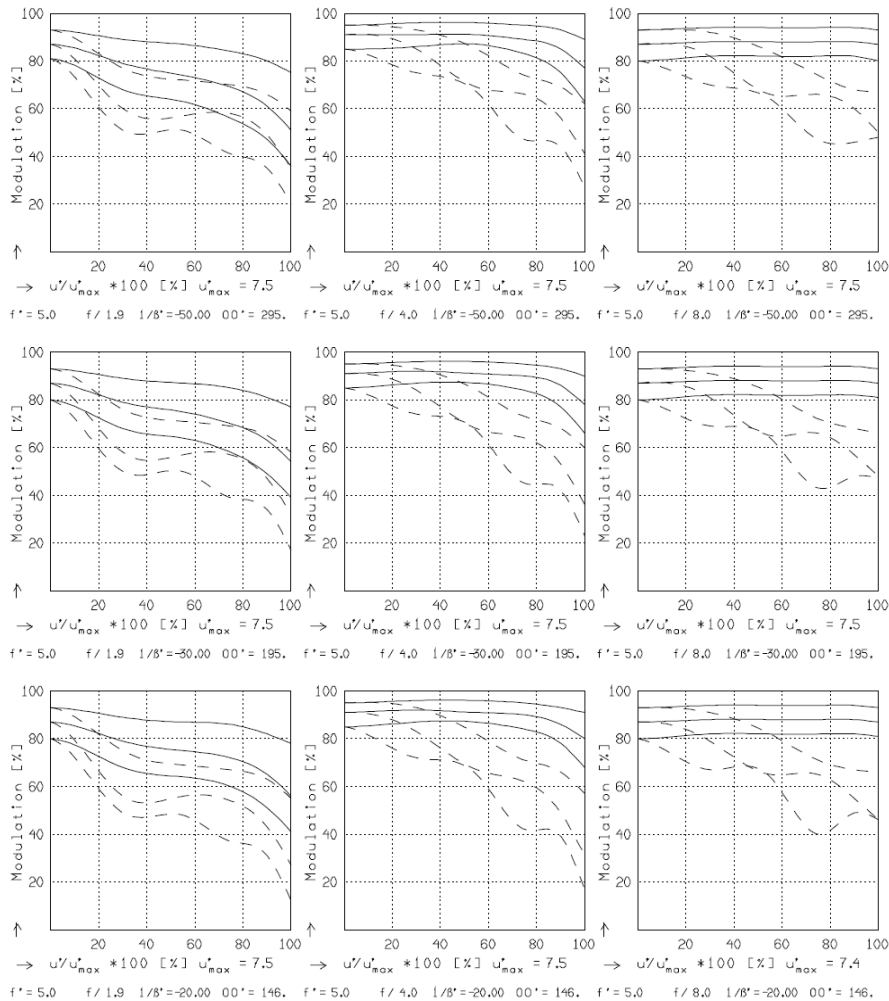


Focusing : MTF<sub>max</sub> at f / 1.8 . R = 30 1/mm.  $u/u'_{max} = 0$

# Cinegon 1.8/4.8 Ruggedized Lens

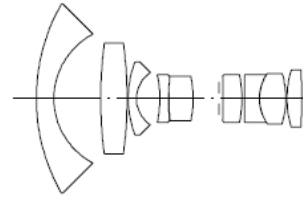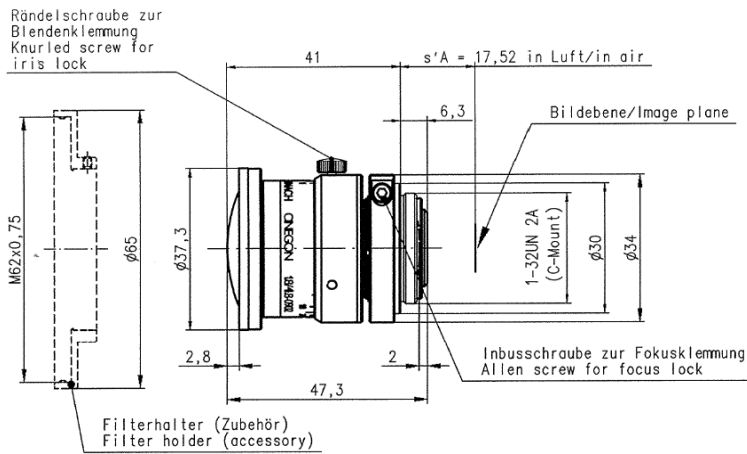

## CINEGON 1.8/4.8

$f' = 5,0$ mm	$\beta'_p = 6,632$
$s_F = 13,2$ mm	$s_{EP} = 13,9$ mm
$s_{F'} = 13,2$ mm	$s_{AP} = -19,8$ mm
$HH' = 35,4$ mm	$\Sigma d = 45,3$ mm

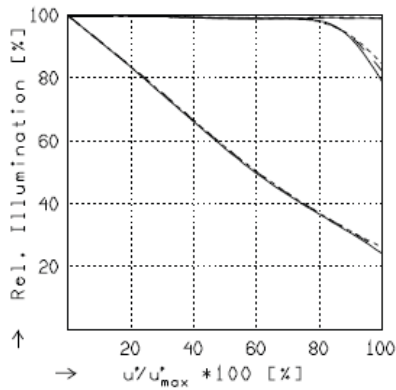


## RELATIVE ILLUMINATION

The relative illumination is shown for the given focal distances or magnifications.

$f / 1.9$        $f / 4.0$        $f / 8.0$


— $\beta' = -0,0200$	$u'_{max} = 5,5$	$00' = 294.$
- - $\beta' = -0,0333$	$u'_{max} = 5,5$	$00' = 195.$
--- $\beta' = -0,0500$	$u'_{max} = 5,5$	$00' = 145.$

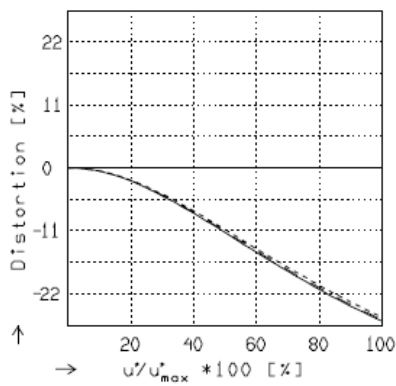

## DISTORTION

Distortion is shown for the given focal distances or magnifications. Positive values indicate pincushion distortion and negative values barrel distortion.

— $\beta' = -0,0200$	$u'_{max} = 5,5$	$00' = 294.$
- - $\beta' = -0,0333$	$u'_{max} = 5,5$	$00' = 195.$
--- $\beta' = -0,0500$	$u'_{max} = 5,5$	$00' = 145.$

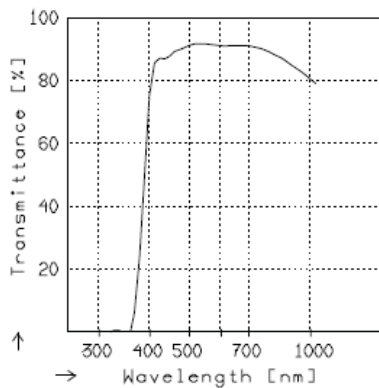

## TRANSMITTANCE

Relative spectral transmittance is shown with reference to wavelength.