

Macro-Varon 4.5/85 with beam splitter

Macro-Varon 4.5/85 with beam splitter

This lens is designed to be used in line scan applications where coaxial illumination is required. The 60 mm beam splitter cube offers the opportunity to create an in-line illumination for high reflective objects. Coaxial illumination is ideal for demanding circuit boards and other high resolution applications where a bright, diffuse uniform illumination is needed.

This lens offers a high optical performance at a 3.5x magnification over the entire field. The lens design considers the optical glass path of the high quality beam splitter to achieve a top performance. Lens and beam splitter assembly are precisely aligned to each other, so that a maximum of light is captured and directed to the image plane of 12k cameras with 5µm pixel size, with almost no loss at the image edges.



Macro-Varon with beam splitter

Key Features

- 3.5x Magnification
- Lens and Beam splitter Cube
- Optimized for 12K Cameras with 5µm Pixel sizes
- Separate azimuth alignment of Beam splitter and Lens


Applications

- PCB / FPD Inspection
- LED inspection
- Flat Glass Inspection
- Wafer Inspection
- Line Scan Applications

Technical Specifications

F-number	4.5
Focal length	85.2 mm
Image circle	62 mm
Recommended Magnification	3.5x
Interface	V38-Mount
Weight	410 gr.
Field of View	17.7 mm
Working distance	62.1 mm
Numerical Aperture	0.087
Illumination drop off	Max. 8 %
Beam splitter size	60 x 25 x 25 mm
Code No.	1069837

Figure 1: relative illumination with beam splitter

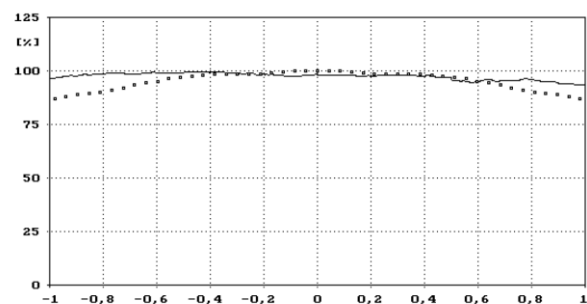

Contact

Jos. Schneider Optische Werke GmbH
 Ringstraße 132
 55543 Bad Kreuznach
 Germany
 Phone +49 671 601-205
 Fax +49 671 601-286
 www.schneiderkreuznach.com
 industrie@schneiderkreuznach.com

Schneider Optical Technologies Co., Ltd.
 Rm. A505 Yingdali Science Park, Hongmian Rd.,
 Futian Free Trade Zone, Shenzhen 518038,
 P.R. China
 Phone: +86 755 88 32 11 70
 Fax: +86 755 88 32 11 75
 www.schneiderkreuznach.com
 info@schneider-asiapacific.com

Schneider Optics Inc.
 285 Oser Ave.
 Hauppauge, NY 11788
 USA
 Phone +1 631 761-5000
 Fax +1 631 761-5090
 www.schneideroptics.com/industrial
 industrial@schneideroptics.com




Macro-Varon 4.5/85 with beam splitter

MRV 4.5/85

MODULATION with reference to the relative image height

Wavelength λ	[nm]	575	675	625	525	475	425
Spectral weighting	[%]	21.9	13.1	18.8	22.5	16.0	7.7
Spatial frequency R	[1/mm]	13	25	50			
Format	[mm X mm]	0.0	62.0				
Diagonal $2u^*$	[mm]	62.0					

radial ———
 tangential - - -

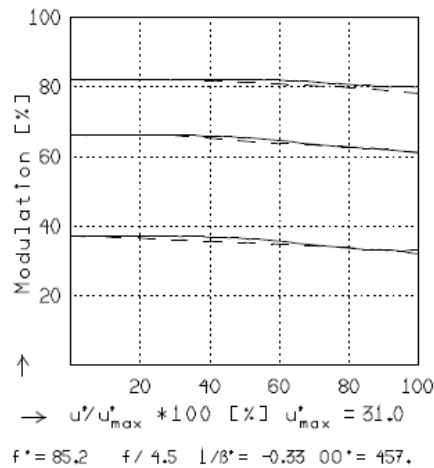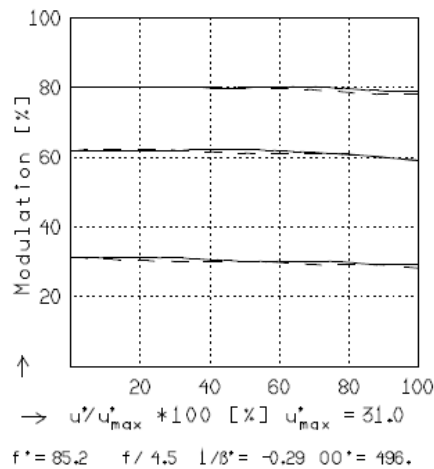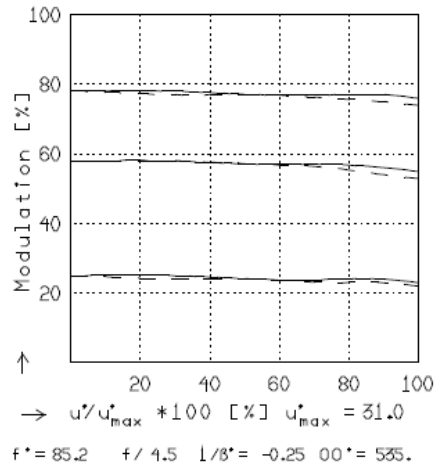

Focusing : MTF_{max} at $f / 4.5$, $R = 50$ 1/mm, $u^*/u_{max}^* = 0$