

# Xenon-RUBY Lens

## Xenon-RUBY 2.2/25

The Xenon-Ruby lens is optimized in accordance with the sensitivity of modern image sensors up to 1 / 1.8" (9mm). This lens is the perfect trade-off between price and performance: By having a practice-oriented speed of 2.2, a very high optical performance is achieved.

Even under production and / or extreme conditions, the robust mechanical design with lockable focus and iris setting mechanism guarantees reliable continuous use in which the set optical parameters remain in place.



Xenon-RUBY 2.2/25

### Key Features

- Robust mechanics for rough industrial environment
- Compact design and low weight
- Focus and iris setting lockable
- High resolution optics
- Transmission 400 - 1000 nm (VIS - NIR)
- Designed for Sensors up to 1 / 1.8" (9mm)

### Applications

- Traffic
- Security/Surveillance
- Machine vision and other imaging applications
- Quality control
- Surface inspection
- 2D / 3D Measurement

### Technical Specifications

F-stop range	2.2 - 16
Focal length	25.2 mm
Image circle	9 mm
Transmission	400 - 1000 nm
Interface	C-Mount
Filter Thread	M25.5 x 0.5
Weight	29 gr.



### Contact

Jos. Schneider Optische Werke GmbH  
 Ringstraße 132  
 55543 Bad Kreuznach  
 Germany  
 Phone +49 671 601-205  
 Fax +49 671 601-286  
[www.schneiderkreuznach.com](http://www.schneiderkreuznach.com)  
[industrie@schneiderkreuznach.com](mailto:industrie@schneiderkreuznach.com)

Schneider Optical Technologies Co., Ltd.  
 Rm. A505 Yingdali Science Park, Hongmian Rd.,  
 Futian Free Trade Zone, Shenzhen 518038,  
 P.R. China  
 Phone: +86 755 88 32 11 70  
 Fax: +86 755 88 32 11 75  
[www.schneiderkreuznach.com](http://www.schneiderkreuznach.com)  
[info@schneider-asiapacific.com](mailto:info@schneider-asiapacific.com)


Schneider Optics Inc.  
 285 Oser Ave.  
 Hauppauge, NY 11788  
 USA  
 Phone +1 631 761-5000  
 Fax +1 631 761-5090  
[www.schneideroptics.com/industrial](http://www.schneideroptics.com/industrial)  
[industrial@schneideroptics.com](mailto:industrial@schneideroptics.com)

# Xenon-RUBY 2.2/25

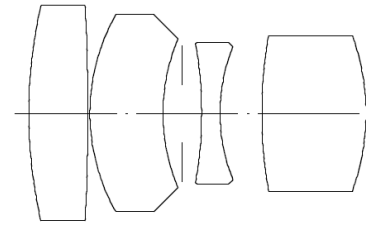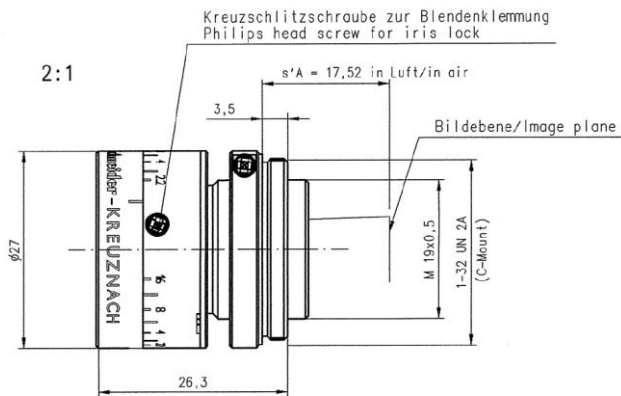

XR 2.2/25


$f'$	= 25.2 mm	$\beta_p'$	= 1.162
$s_F$	= -14.5 mm	$s_{EP}$	= 7.2 mm
$s_{F'}$	= 16.6 mm	$s_{AP}$	= -12.7 mm
$HH'$	= -2.0 mm	$\Sigma d$	= 17.4 mm

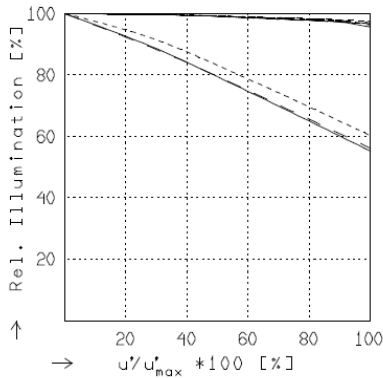

## RELATIVE ILLUMINATION

The relative illumination is shown for the given focal distances or magnifications.


$f / 2.3$	$f / 4.0$	$f / 5.6$
— $\beta' = -0.0200$	$u'_{max} = 4.5$	$00' = 1310.$
- - $\beta' = -0.0500$	$u'_{max} = 4.5$	$00' = 554.$
.... $\beta' = -0.1000$	$u'_{max} = 4.5$	$00' = 303.$

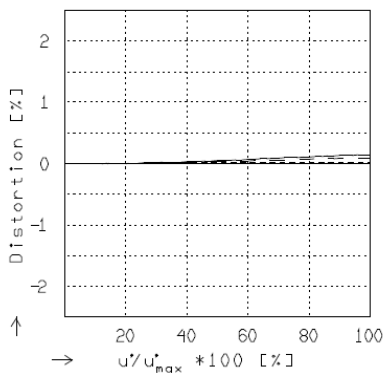

## DISTORTION

Distortion is shown for the given focal distances or magnifications. Positive values indicate pincushion distortion and negative values barrel distortion.

— $\beta' = -0.0200$	$u'_{max} = 4.5$	$00' = 1310.$
- - $\beta' = -0.0500$	$u'_{max} = 4.5$	$00' = 554.$
.... $\beta' = -0.1000$	$u'_{max} = 4.5$	$00' = 303.$

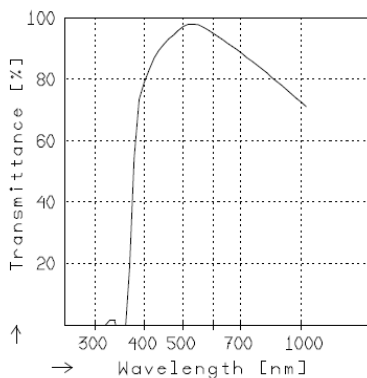

## TRANSMITTANCE

Relative spectral transmittance is shown with reference to wavelength.


# Xenon-RUBY 2.2/25

## XENAR 2.2/25


MODULATION with reference to the relative image height

Wavelength $\lambda$	[nm]	555	655	605	505	455	405
Spectral weighting	[%]	19.8	23.7	22.2	15.7	12.1	6.7
Spatial frequency R	[1/mm]	20	40	80			
Format	[mm X mm]	0.0	9.0				
Diagonal $2u'$	[mm]	9.0					


radial —  
tangential - -

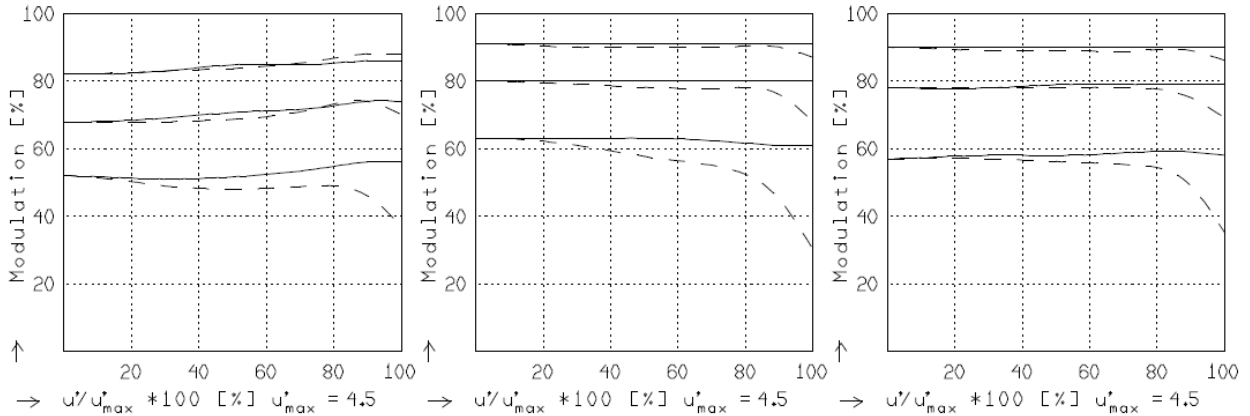

$f' = 25.2$   $f / 2.3$   $1/B' = -50.00$   $00' = 1310$ .   
 $f' = 25.2$   $f / 4.0$   $1/B' = -50.00$   $00' = 1310$ .   
 $f' = 25.2$   $f / 5.6$   $1/B' = -50.00$   $00' = 1310$ .

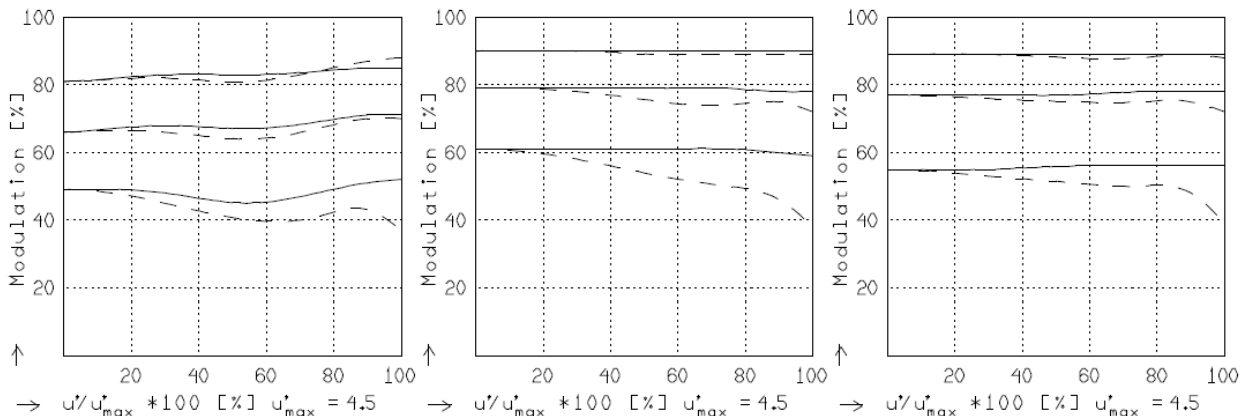

$f' = 25.2$   $f / 2.3$   $1/B' = -20.00$   $00' = 554$ .   
 $f' = 25.2$   $f / 4.0$   $1/B' = -20.00$   $00' = 554$ .   
 $f' = 25.2$   $f / 5.6$   $1/B' = -20.00$   $00' = 554$ .

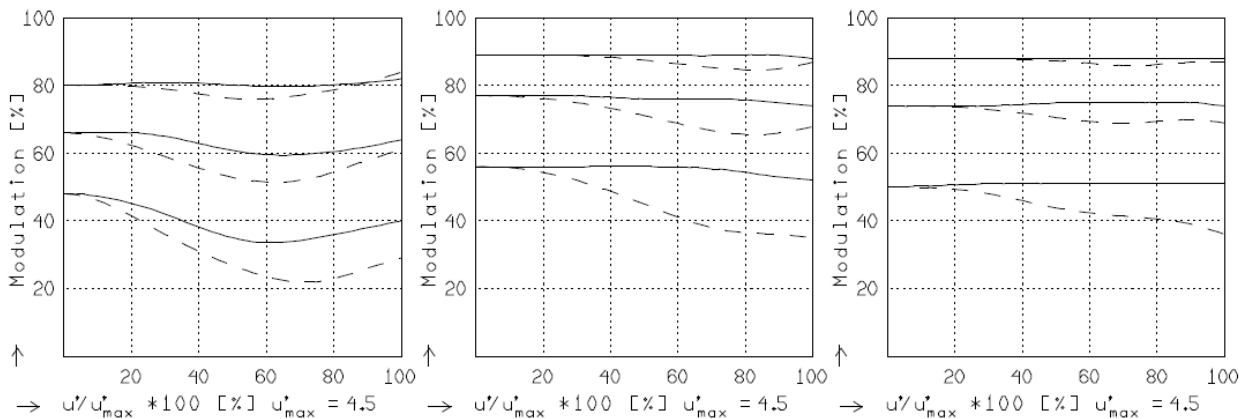

$f' = 25.2$   $f / 2.3$   $1/B' = -10.00$   $00' = 303$ .   
 $f' = 25.2$   $f / 4.0$   $1/B' = -10.00$   $00' = 303$ .   
 $f' = 25.2$   $f / 5.6$   $1/B' = -10.00$   $00' = 303$ .

Focusing :  $MTF_{max}$  at  $f / 2.2$  ,  $R = 80$  1/mm,  $u'/u'_{max} = 0$