

Xenon-RUBY Lens

Xenon-RUBY 2.3/16

The Xenon-Ruby lens is optimized in accordance with the sensitivity of modern image sensors up to 1 / 1.8" (9mm). This lens is the perfect trade-off between price and performance: By having a practice-oriented speed of 2.3, a very high optical performance is achieved.

Even under production and / or extreme conditions, the robust mechanical design with lockable focus and iris setting mechanism guarantees reliable continuous use in which the set optical parameters remain in place.



Xenon-RUBY 2.3/16

Key Features

- Robust mechanics for rough industrial environment
- Compact design and low weight
- Focus and iris setting lockable
- High resolution optics
- Transmission 400 - 1000 nm (VIS - NIR)
- Designed for Sensors up to 1 / 1.8" (9mm)

Applications

- Traffic
- Security/Surveillance
- Machine vision and other imaging applications
- Quality control
- Surface inspection
- 2D / 3D Measurement

Technical Specifications



F-stop range	2.3 - 16
Focal length	15.9 mm
Image circle	9 mm
Transmission	400 - 1000 nm
Interface	C-Mount
Filter Thread	M25.5 x 0.5
Weight	60 gr.
Code No.	1074626

Contact

Jos. Schneider Optische Werke GmbH
 Ringstraße 132
 55543 Bad Kreuznach
 Germany
 Phone +49 671 601-205
 Fax +49 671 601-286
 www.schneiderkreuznach.com
 industrie@schneiderkreuznach.com


Schneider Optical Technologies Co., Ltd.
 Rm. A505 Yingdali Science Park, Hongmian Rd.,
 Futian Free Trade Zone, Shenzhen 518038,
 P.R. China
 Phone: +86 755 88 32 11 70
 Fax: +86 755 88 32 11 75
 www.schneiderkreuznach.com
 info@schneider-asiapacific.com

Schneider Optics Inc.
 285 Oser Ave.
 Hauppauge, NY 11788
 USA
 Phone +1 631 761-5000
 Fax +1 631 761-5090
 www.schneideroptics.com/industrial
 industrial@schneideroptics.com

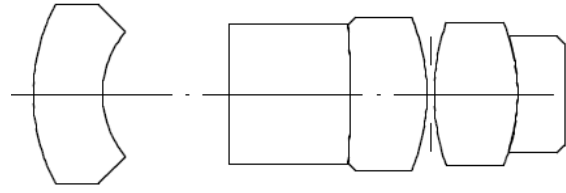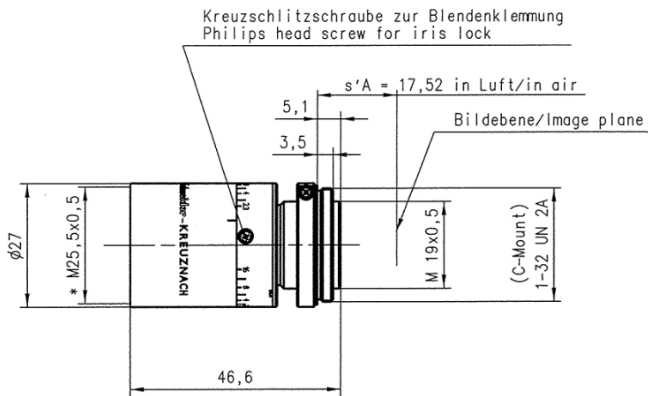

XR 2.3/16


f'	= 15.9 mm	β'_p	= 1.446
s_F	= 9.2 mm	s_{EP}	= 20.2 mm
$s_{F'}$	= 17.1 mm	s_{AP}	= -5.9 mm
HH'	= 15.9 mm	Σd	= 39.8 mm

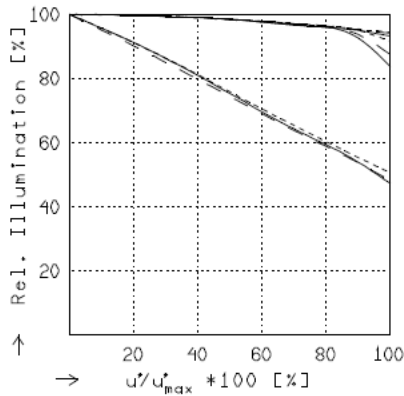

RELATIVE ILLUMINATION

The relative illumination is shown for the given focal distances or magnifications.


	$f / 2.3$	$f / 4.0$	$f / 5.6$
—	$\beta' = -0.0200$	$u'_{max} = 4.4$	$00' = 843.$
- -	$\beta' = -0.0500$	$u'_{max} = 4.4$	$00' = 367.$
----	$\beta' = -0.1000$	$u'_{max} = 4.5$	$00' = 208.$

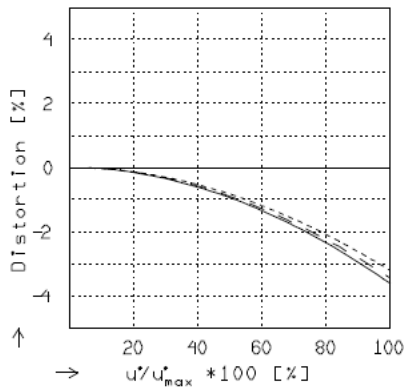

DISTORTION

Distortion is shown for the given focal distances or magnifications. Positive values indicate pincushion distortion and negative values barrel distortion.

—	$\beta' = -0.0200$	$u'_{max} = 4.5$	$00' = 843.$
- -	$\beta' = -0.0500$	$u'_{max} = 4.5$	$00' = 367.$
----	$\beta' = -0.1000$	$u'_{max} = 4.5$	$00' = 208.$

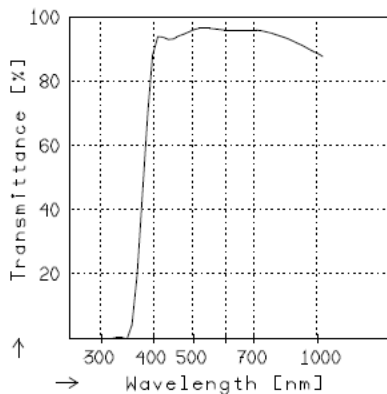

TRANSMITTANCE

Relative spectral transmittance is shown with reference to wavelength.


Xenon-RUBY 2.3/16

XR 2.3/16

MODULATION with reference to the relative image height

Wavelength λ	[nm]	555	655	605	505	455	405
Spectral weighting	[%]	19,8	23,7	22,2	15,7	12,1	6,7
Spatial frequency R	[1/mm]	20	40	80			
Format	[mm X mm]	0.0	9.0				
Diagonal $2u^*$	[mm]		9.0				

radial —
tangential - -

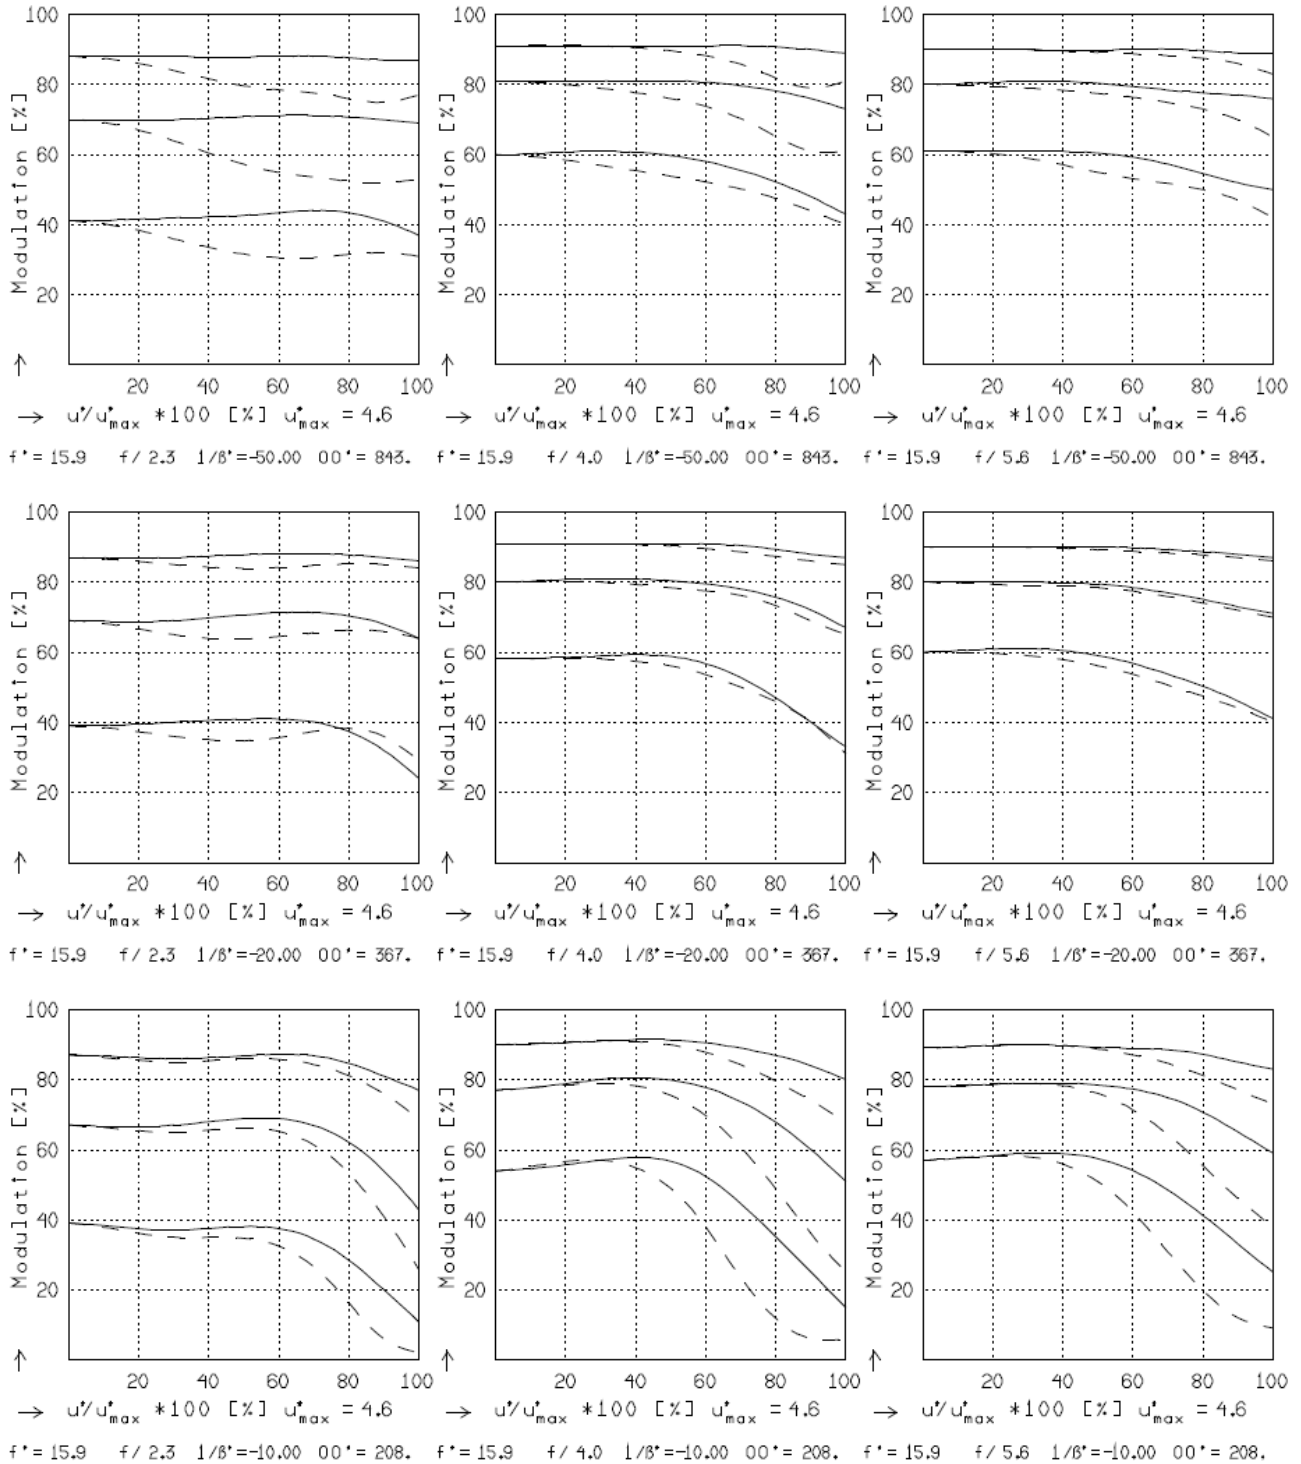

Focusing : MTF_{max} at $f / 2.3$, $R = 80$ 1/mm, $u'/u'_{max} = 0$